



SINGLE LRU HD EO/IR IMAGING SYSTEM

Star SAFIRE[®] 380-HD

The FLIR Star SAFIRE 380-HD provides superior image stabilization, ultra-long range imaging performance, and true metadata embedded in the digital video. Featuring internal navigation for precise targeting, a MWIR thermal imager, optional HD color and low-light cameras, and multiple laser payload options, the system is fully hardened for military fixed-wing and helicopter operations. It can operate continuously in all conditions – even while sitting on the tarmac with no airflow.

HD sensors allow Star SAFIRE 380-HD to detect, recognize, and positively identify targets with pinpoint precision at extreme ranges – capabilities beyond what’s possible with non-HD systems. Mission crews can remain undetected at safe standoff distances while viewing high-resolution imagery in narrow and wide fields of view. With flexible integration options on multiple platforms and a record of proven performance, Star SAFIRE 380-HD is optimal for airborne intelligence, surveillance, reconnaissance, patrol, and search and rescue missions.

FEATURES

SUPERIOR RANGE AND IMAGING

120x-magnification extends detection range. Laser payloads covertly illuminate and point out targets and determine distance and location.

SINGLE LRU FULL-HD MULTI-SENSOR IMAGING

The only all-digital, full HD system in a single LRU, it’s easy to install and integrate – no junction boxes required.

FULL DIGITAL IMAGE BLENDING

The system combines HD IR, color, and SWIR spectral information for enhanced results – essential in single video channel downlinks.

PRECISION TARGETING

Tightly coupled navigation delivers accurate target coordinate-generation for faster, more confident targeting.

LESS OPERATOR EFFORT REQUIRED

Intelligent, automated operation optimizes tracking and continuously indicates target size, location, speed, and distance.

APPLICATIONS

ISR

SAR

MARITIME PATROL

BORDER PATROL

UAS/RPA

FORCE PROTECTION

SPECIFICATIONS

THERMAL IMAGER

Sensor type	1280 x 720 InSb MWIR FPA (standard) 640 x 512 InSb MWIR FPA (optional)
Resolution	720p/1080p HD and NTSC/PAL
Wavelength	3-5 μ m response
FOVs	40° to 0.35° (with standard FPA)
Zoom ratio	120x

COLOR HIGH DEFINITION CAMERA (OPTIONAL)

Sensor type	Color CCD, Progressive Scan
Resolution	720p/1080p HD and NTSC/PAL
FOVs	29° to 0.25°
Zoom ratio	120x

COLOR LOW LIGHT HIGH DEFINITION CAMERA (OPTIONAL)

Sensor type	Color NIR CCD, Progressive Scan
Resolution	720p/1080p HD and NTSC/PAL
FOVs	50° to 2.2°

SWIR SHORT WAVE IR CAMERA (OPTIONAL)

Sensor type	InGaAs
Resolution	720p/1080p HD and NTSC/PAL
FOVs	33° to 0.28°

LASER PAYLOADS (OPTIONAL)

Rangefinder	Up to 30 km, Class 1 (eyesafe), Class 1M over 2Hz
Illuminator	1 W or 2 W, Class 4
Pointer	150 mW (Class 3b) or 650 mW (Class 4)

DIGITAL IMU/GPS

Type	Tightly-coupled, fully-integrated, IMU and GPS for geo-pointing and target geo-location capability
------	--

SYSTEM PERFORMANCE

System type	4-axis stabilization
Az. coverage	360° continuous
El. coverage	+30° to -120°
Envelope	405 KIAS, 0-50,000 ft

SYSTEM INTERFACES

Digital video	SMPT 292M; MISB 2016.1; STANAG 4609
Analog video	NTSC/PAL
Data and control	RS-422, ARINC 429, MIL-STD-1553B, Ethernet
Metadata	MISP ST0601, 0902, 9716; STANAG 4609; SMPT 291M / RP214

ENVIRONMENTAL

Standards	MIL-STD-810G and MIL-STD-461F
Operating temperature	-40°C to 55°C

POWER REQUIREMENTS


Voltage	22-29 VDC (per MIL-STD-704F)
Consumption (Steady State)	280 W typ., 336W max

DIMENSIONS, WEIGHT & MOUNTING

Single LRU	15.0" x 18.7" (380 mm x 475 mm)
TFU Weight	<100 lbs (45.4 Kg)
Mounting	Compatible with existing SAFIRE installations

OTHER OPTIONS & ACCESSORIES

Navigation/Radar Interfaces, Quick-Disconnect Mounts, High Resolution Displays and Recorders, Moving Map Systems, High-Definition Downlinks, Moving Target Indicator (MTI)
Reg. US Patent 7,474,451 and 7,264,220, other patents pending

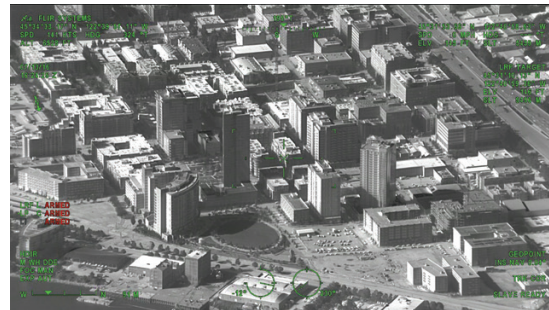

AMERICAS

FLIR Systems, Inc.
Corporate Headquarters
27700 SW Parkway Ave
Wilsonville, OR 97070
Office: +1 877.773.3547

FLIR Systems, Inc.
DC Headquarters
1201 S. Joyce Street
Suite C006
Arlington, VA 22202
Office: +1 703.682.3400

EUROPE

FLIR Systems
2 Kings Hill Avenue - Kings Hill
West Malling, Kent ME19 4AQ
United Kingdom
Office: +44 (0)1732 220 011
Fax: +44 (0)1732 843 707

FLIR Systems AB
Antennvägen 6,
PO Box 737
SE-187 66 Täby
Sweden
Office: +46 (0)8 753 25 00

MIDDLE EAST

FLIR Systems B.V. - Abu Dhabi
Wadi Al Fey St.
Building 60, Office # 302
New Ministries Exit / Khalifa Park Area
Abu Dhabi, U.A.E.
Office: +971 2 666 1561
e-Fax: +1 503 914 1591

FLIR Systems Saudi Arabia
Office 127, First Floor
Akaria Plaza Building, Olaya Street
Riyadh, 11481, Saudi Arabia
Office: +966 11 464 5323
Fax: +966 11 464 0438

ASIA

FLIR Systems Japan K.K.
Meguro Tokyu Bldg. 5F,
2-13-17
Kami-Osaki, Shinagawa-ku.
Tokyo, 141-0021, Japan
Office: +81-3-6721-6648



For More Information contact
surveillance_sales@flir.com

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. 04/07/2020

20-0602-SUR-380HD US_LTR



The World's Sixth Sense®