

HI-SCAN™ 145180-160kV

HEIMANN X-RAY TECHNOLOGY



Feature Highlights

- Universal X-ray system for palletized items
- Excellent image presentation (optimized X-ray geometry)
- Conveyor options allow for different screening requirements
- Tunnel-dimensions suitable for typical air cargo pallet sizes
- Typical penetration: 35 mm of steel

The HI-SCAN 145180-160kV has been specially designed to meet the needs and applications of warehouses, carriers, forwarders and couriers for airports (palletized Lower Deck - Cargo).

The HI-SCAN 145180-160kV is a low energy (160 kV) X-ray inspection system with tunnel dimensions of 1450 mm (57") width and 1800 mm (71") height. It is especially suitable for the inspection of air cargo transported on standard Euro, British or US pallets.

Operator training courses offered by Smiths Heimann have an excellent reputation all over the world and they are carried out individually for each customer.

As a leading supplier of X-ray inspection systems Smiths Heimann provides an efficient, global service network working fast and reliably.

General Specifications

Tunnel dimensions	1450 (W) x 1800 (H) [mm] • 57" (W) x 70.9" (H)
Max. object size	1440 (W) x 1700 (H) [mm] • 56.7" (W) x 66.9" (H)
Conveyor type	standard: heavy duty roller conveyor (capacity 2t, evenly distributed) optional: small pitch roller conveyor (capacity 5t, evenly distributed) optional: chain link conveyor (capacity 2t, evenly distributed)
Conveyor height ¹⁾	approx. 315 mm (12.4")
Conveyor speed	typical 0.24 [m/s]
max. conveyor load even distributed over the whole conveyor	standard: 2000 kg (4409 lbs) • option small pitch roller conveyor 5000 kg (11023 lbs) / 1,00 t/m (672 lbs/ft)
Resolution (wire detectability)	standard: 36 AWG (0.13 mm) • typical: 38 AWG (0.10 mm)
Penetration (steel)	standard: 32 mm • typical: 35 mm
X-ray dose / inspection (typical)	standard: 0.8 µSv (0.08 mrem) • with HI-MAT: 1.5 µSv (0.15 mrem)
Film safety	guaranteed up to ISO 1600 (33 DIN)
Duty cycle	100 %, no warm-up procedure required

X-ray Generator

Anode voltage • cooling	160 kV cp operated • hermetically sealed oil bath
Beam direction	diagonal

Image Generating System

X-ray converter	L-shaped detector line
Grey levels stored	4096
Image presentation	B/W, color
Digital video memory	1280 x 1024 / 24 bit
Image evaluation functions	VARI, O ² , OS, HIGH electronic zoom: stepless enlargement up to 64-times
Monitor	Flat Panel LCD Monitor

Additional Features

Functions	fading-in of date/time, luggage counter, user id-number, luggage marking system (acoustic), display of operating mode, REVIEW-feature (to recall previously visible image areas), zoom overview, free programmable keys, USB 2.0 interface, stepless zoom
Options	HI-TIP, HI-SPOT, SEN, XPlore, IMS (Image Store System - stores up to 100,000 images), Xport

Installation Data

X-ray leakage	meets all applicable laws and regulations with respect to X-ray emitting devices.
CE-labelling	in compliance with guidelines 2006/42/EC, 2014/35/EU, 2014/30/EU
Operating- / storage temperature	0° - 40°C / -20°C - +60°C
Humidity	10% - 90% (non-condensing)
Power supply ⁴⁾	standard: 230 VAC +10% / -15% • 50 Hz / 60 Hz ± 3 Hz option: 400 VAC • 3 phases • 50 Hz ± 3 Hz
Power consumption	approx. 1.6 kVA (without options)
Protection class keyboard	IP 43
Dimensions • Weight ^{5) 6)}	5520 (L) x 2140 (W) x 2300 (H) [mm] • approx. 1900 kg 217.3" (L) x 84.3" (W) x 90.6" (H) • approx. 4189 lbs
Mechanical construction	steel construction with steel panels, mounted on roller castors standard color(s): RAL 7016 (dark gray)

¹⁾ approx. values (adjustable)


²⁾

³⁾

⁴⁾ depending on conveyor variant, different values optional

⁵⁾ without control desk, keyboard, monitor(s) etc.

⁶⁾ optional extension available

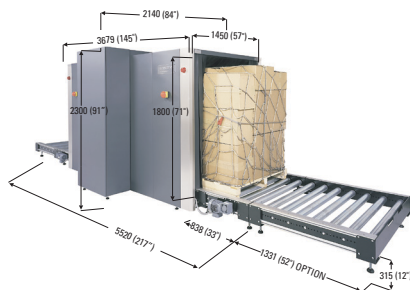

optional chain link conveyor

For product information, sales or service, please go to www.smithsdetection.com/locations

Smiths Heimann GmbH, Im Herzen 4, 65205 Wiesbaden, Germany
Modifications reserved. 95591021 29/01/2020 © Smiths Detection Group Ltd. - In some cases, the figures contain options
HI-SCAN is a trademark of Smiths Detection Group Ltd.